



EMMEGI ELETTRONICA
BOLOGNA - ITALY

THE "EASY-CHARGE" WORLD




The feeder in the picture alongside, is the version EASY-CH1/50, equipped with a larger hose, capable of carrying large granules of glue.

Below you can see the size of the granules (0.7 in).



The high consumption of glue of this applicator with a tank of 13kg, required frequent manual filling of glue. Now the automatic feeder EASY-CHARGE maintains the optimal level of adhesive.

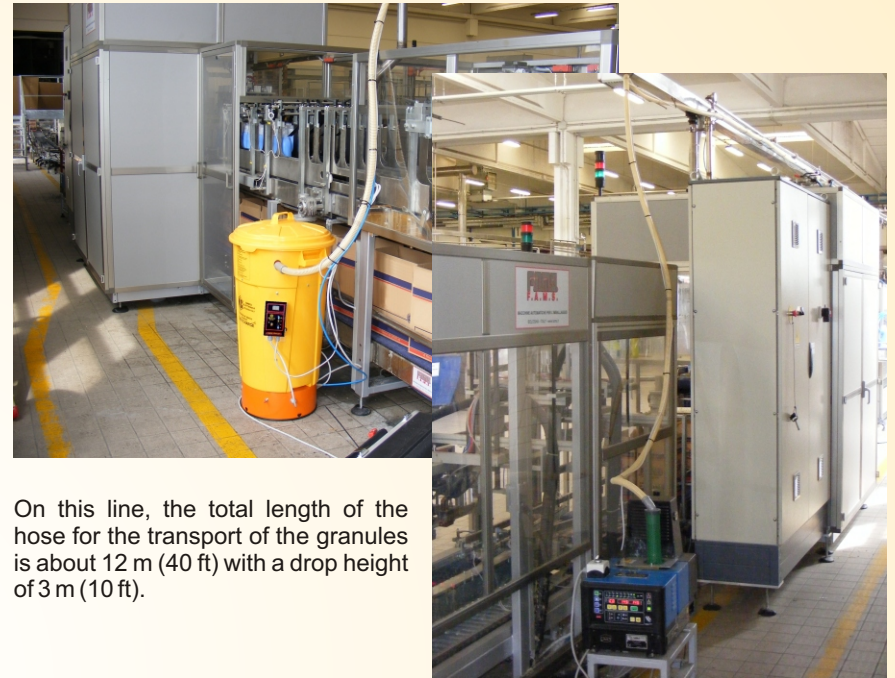

On this line, the total length of the hose for the transport of the granules is about 12 m (40 ft) with a drop height of 3 m (10 ft).



On the right there is a 4 channel feeder. It feeds 4 independent systems.

The Hot-Melt system in the photo is set at a distance of 40m (130 ft), thanks to the optional Repeater Group EASY-RPT.

The hopper on the Hot-Melt system is equipped with the optional filter EASY-FIL, that protect the tank from the dust and avoids the diffusion of vapors of molten glue.

EASY-CHARGE is able to overcome elevation difference. One of the hoses of the 2 channel feeder on the left, has a starting rise of about 4 m (13 ft). Then it runs horizontally for about 12 m (40 ft), and finally it goes down for 3 m (10 ft) to the Hot-Melt system.





EMMECI ELETTRONICA
BOLOGNA - ITALY
www.emmeci-elettronica.com

THE POKER OF HOT-MELT SYSTEMS

